

HIGH SPEED PRECISION LATHE

LA -460 / 560 x 500, 750, 1000, 1500, 2000

Spindle bore : 52mm (2.05") 8 steps speed : 80-1400 rpm

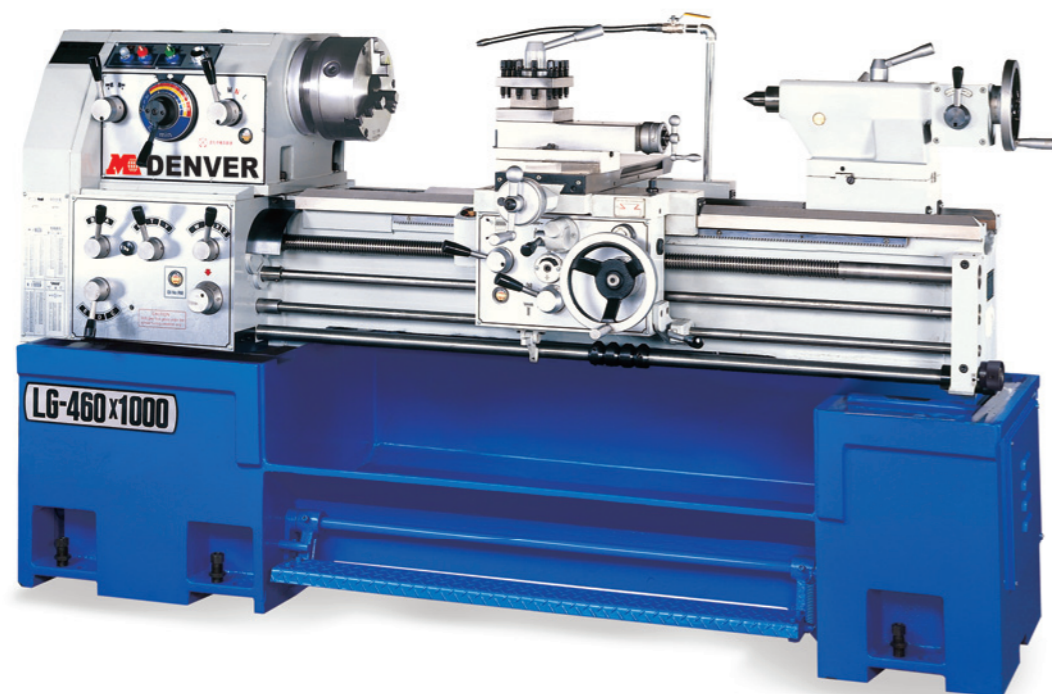


photo shown : LA-460X1000

HIGH SPEED PRECISION LATHE

LG -460 / 560 x 500, 750, 1000, 1500, 2000

Spindle bore : 70mm (2.76") 12 steps speed : 25-1800 rpm



★ Large spindle bore ϕ 70mm (2.76") in all same type lathe, high hardness, for best heavy duty cutting.

★ 2 stage feeding device tailstock with patent design on gear tightening type for turning stability.


photo shown : LG-460X1000

HIGH SPEED VARIABLE-SPEED LATHE

LV -460 / 560 x 500, 750, 1000, 1500, 2000

Spindle bore : 52mm (2.05") Variable speed : 30-1800 rpm

<http://www.topdenver.com>

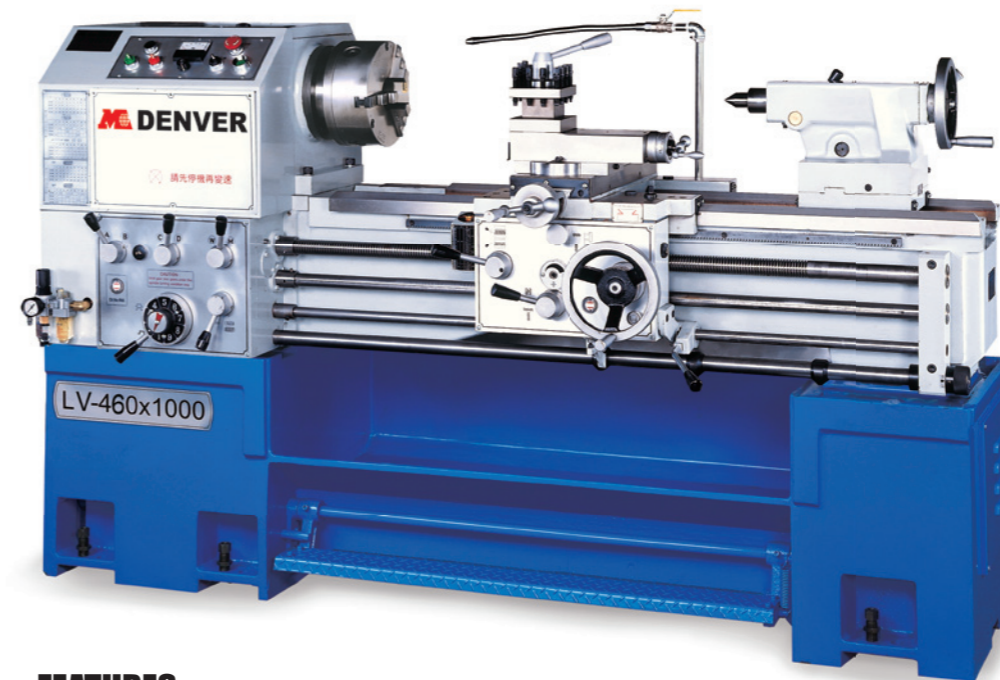

Main Features / Variable spindle, auto speed change.

Speed adjustable, easy operation, economy.

- Non-stop in face, inner & outer dia. turning.
- No speed jump during turning to protect gears.
- Auto switch between fast & slow spindle retreat in no-operation.

photo shown : LV-460X1000

FEATURES : (for LV, LA, LG)

- One piece Meehamite casting machine base.
- Metric & inch gear box with full range of inch, metric, DP, MP threading and multiple threads, all function is reached without change gear.
- Apron enforced oil supply with safety device is used to avoid collision.
- Bed ways & surface of compound rest have been ultra-frequency heat treated & ground to provide a longer life.
- Cross way feeding guides screw: 2points support for heavy cutting.
- Length safety foot brake.
- Dynamically balanced alloy spindle is adopted 3 points of bearing support.
- The gears in headstock and spindle are hardened & precision ground.

STANDARD ACCESSORIES



ST6
3-jaw scroll chuck



ST7
Steady rest 6"



ST12
Tools & tool box


OPTIONAL ACCESSORIES



OP1
Follow rest



OP2
4-jaw independent chuck 12"




OP3
Face plate 14"



OP4
Digital readout



OP5
Halogen light



OP6
Back splash guard



OP7
3-Jaw strong scroll chuck