



## BT-MTA

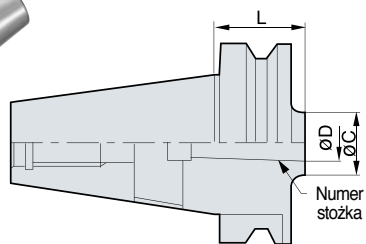

Rys. 1

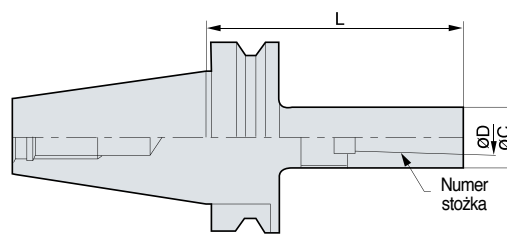

Rys. 2

(mm)

Oznaczenie	Stan	Numer stożka Morse'a	L	D	C	kg	Rys.
<b>BT30 - MTA1 - 45</b>	●	1	45	12.065	25	0.6	1
MTA2 - 60	●	2	60	17.780	32	0.6	1
MTA3 - 80	●	3	80	23.825	40	0.6	1
<b>BT40 - MTA1 - 45</b>	●	1	45	12.065	25	1.1	1
120	●	1	120	12.065	25	1.2	2
MTA2 - 60	●	2	60	17.780	32	1.1	1
120	●	2	120	17.780	32	1.6	2
MTA3 - 75	●	3	75	23.825	40	1.2	1
135	●	3	135	23.825	40	1.7	2
MTA4 - 95	●	4	95	31.267	50	1.3	1
165	●	4	165	31.267	50	3.0	2
<b>BT50 - MTA1 - 45</b>	●	1	45	12.065	25	3.9	1
120	●	1	120	12.065	25	4.2	2
180	●	1	180	12.065	25	4.3	2
MTA2 - 45	●	2	45	17.780	32	3.9	1
135	●	2	135	17.780	32	4.3	2
180	●	2	180	17.780	32	4.6	2
MTA3 - 45	●	3	45	23.825	40	3.8	1
150	●	3	150	23.825	40	4.6	2
180	●	3	180	23.825	40	4.9	2
MTA4 - 75	●	4	75	31.267	50	3.9	1
180	●	4	180	31.267	50	5.4	2
MTA5- 105	●	5	105	44.399	65	4.5	1
210	●	5	210	44.399	65	7.2	2

• Narzędzie z trzonkiem ze stożkiem Morse'a (wierć, rozwiertak, itp.)

● : Pozycja standardowa ○ : Pozycja na zamówienie

