


型號	MODEL	MOTO-20	MOTO-32	MOTO-42	MOTO-52	MOTO-65	MOTO-80
規格	SPECIFICATIONS	3.0 M / 3.6 M					
料管尺寸	GUIDE CHANNEL	21 mm	33 mm	43 mm	53 mm	66 mm	81 mm
棒材直徑	BAR DIAMETER	10 - 20 mm	10 - 32 mm	10 - 42 mm	10 - 52 mm	10 - 65 mm	10 - 80 mm
棒材容量	BAR CAPACITY	10 mm / 36 pcs					
棒材長度	BAR LENGTH	3.2 M / 3.8 M					
機械總重	MACHINE WEIGHT	3.0 M - 2100 KG / 3.6 M - 2600 KG					
空壓系統	AIR PRESSURE	6 kgf / cm² 70psi					
傳動系統	TRANSMISSION	SERVO MOTOR					
油類	LUBRICANT	FK ISO VG68 FK HYDRAULIC OIL 68					
油箱容量	CAPACITY	79L (21 GALLON)					
消耗功率	POWER CONSUMPTION	2000W					
電源供應	POWER SUPPLY	3ø x 220V 50/60Hz					

若需要其他資料請上網查詢 Check our website for more details at: www.barload.com.tw



規格如有更改，恕不另行通知。 The spec is subject to change without prior notice.

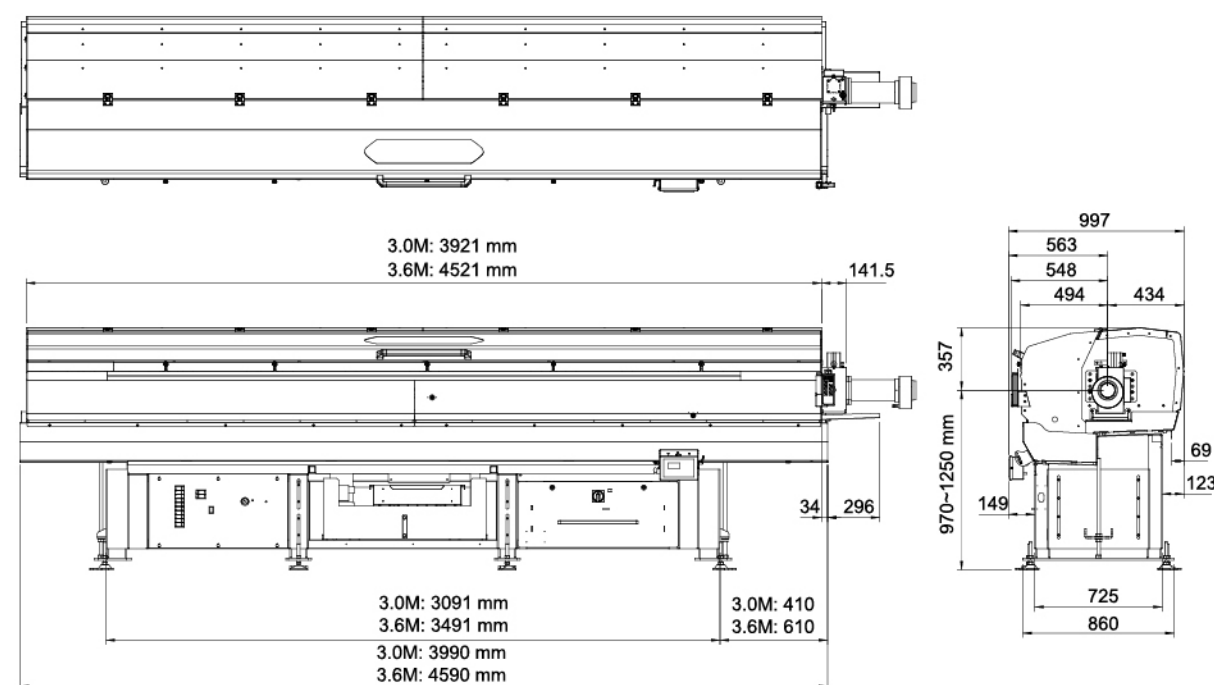

富豪機電股份有限公司
BARLOAD MACHINE CO., LTD.

No. 138, Wei-Hsin Road, Shi-Pai Li, Chang-Hua City, Taiwan 50080


50080彰化市石牌里維新路138號

TEL: +886-4-7384895 FAX: +886-4-7320282

E-mail: info@barload.com.tw

www.barload.com.tw

經銷商 Agent

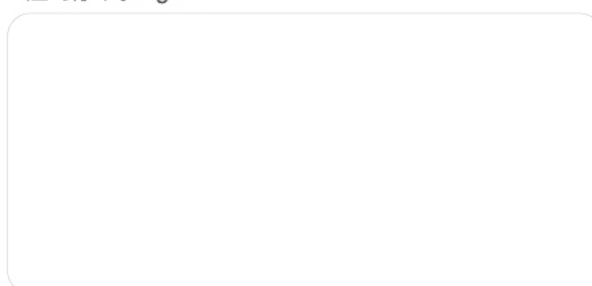


本公司保留設計變更的權利 All Rights Reserved.

ACW 2017.09.1000CE



www.barload.com.tw

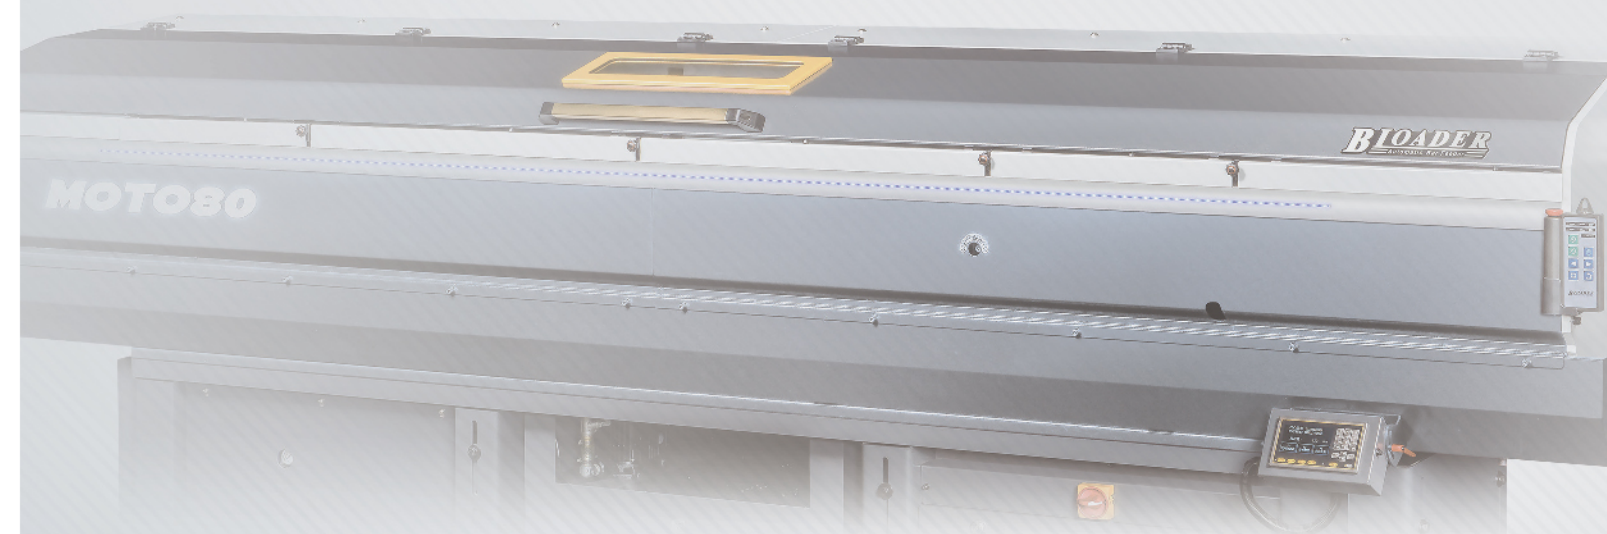

創新研發 · 台灣領航
品質追求 · 世界第一


Quality Innovation
Reliability Experience



MOTO 80
系列 Series
10 - 80 mm

HYDRODYNAMIC BAR FEEDER

長 棒 材 送 料 機

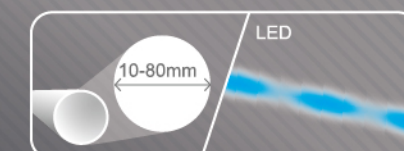




LED遠端監控
LED-stripe Display Features Operative Status

- » LED燈光外部顯示器，送料加工中棒材長度、換料、送料機異常、車床異常等訊息經LED燈光顯示以視覺表現，方便工作人員遠距離監控。(專利)
- » Equipped with LED external display. During bar feeding, various messages such as "bar length", "bar change", "feeder error", and "CNC lathe error" are more easily shown, permitting remote monitoring. (Patented)



智慧型人機介面
Fuzzy Human Machine Interface

- » 專用式人機面板，設定操作簡單，並內建多功能模式選擇，以因應不同使用需求。
- » Multi-function features with Human-machine-interface display.

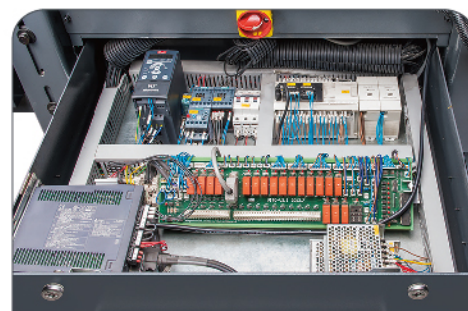

電控系統
Electrical System

- » 全功能三菱PLC控制器與全方位資料庫軟體概念，送料工作中位置、扭力、速度，搭配車床控制精準。
- » Mitsubishi PLC database. Feeding position, torque and speed are accurately and perfectly interfaced with lathes.




手控器
Movable Remote Controller

- » 手控盒，易於操作，符合人體工學。
- » Remote control greatly increases convenience as user friendly.



防震系統
Anti-vibration System

- » V型防震塊組，依棒材大小調整防震，節省更換時間及防震塊費用，並可使用圓形防震塊組。
- » Easy adjusting anti-vibration device, without change-over.

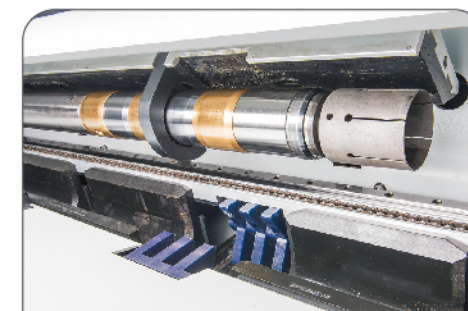

免調整夾料系統
Clamping-device Requires No Adjustment

- » 材料尺寸大小無需調整，挾持力量增強，挾持不鬆脫省時方便。
- » A reliable clamping mechanism.



高分子膠管
Optional high-polymer-made guide channel set. (PU)

- » 更換料管，快速容易，多種尺寸選擇，送料時省力順暢，消音效果佳。
- » Easy quick changeover and less noise.



- » 下料無聲，無振動，材料引導方便，置料伺服馬達料。
- » Silent load, free vibration, smooth load, servo motor.

- 夾料免調整。(專利)
- 隱藏式高安全性配線。
- 換料時間快速。
- 可依實際需求，調整扭力及速度。
- 油與殘料分離收集設計。
- 已通過CE認證。
- 下料穩定安靜。

- Free-adjustment for sizing bar materials. (patented)
- Hidden-and-secured wirings.
- Speedy bar-change.
- Adjustable torque force and speed.
- Well-designed for separating lubricant drain and remnant collection.
- CE certificated.
- Load quietly & stably.



MOTO 80
系列 Series

HYDRODYNAMIC BAR FEEDER

長 棒 材 送 料 機